

OSB4XNEHE1E VER C.1

#### **■Features**

- · Highest Luminous Flux
- · Super Energy Efficiency
- · Long Lifetime Operation
- · Superior ESD protection
- · Superior UV Resistance


## Applications

- Read lights (car, bus, aircraft)
- Portable (flashlight, bicycle)
- · Bollards / Security / Garden
- Traffic signaling / Beacons
- In door / Out door Commercial lights
- · Automotive Ext

## **Outline Dimension**

(Ta=25°C)


(Ta=25°C)

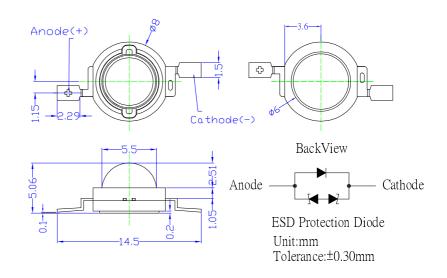

## **■**Absolute Maximum Rating

Item	Symbol	Value	Unit
DC Forward Current	$I_{F}$	200	mA
Pulse Forward Current*	$I_{FP}$	250	mA
Reverse Voltage	V <sub>R</sub>	5	V
Power Dissipation	$P_D$	800	mW
Operating Temperature	Topr	-30 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40~ +100	$^{\circ}\!\mathbb{C}$
Lead Soldering Temperature	Tsol	260°€/5sec	-


## Directivity



#### **■**Electrical -Optical Characteristics

				<b>,</b>	,	
Item	Symbol	Condition	Min.	Тур.	Max.	Unit
DC Forward Voltage	$V_{\mathrm{F}}$	I <sub>F</sub> =150mA	3.0	3.3	4.0	V
DC Reverse Current	$I_R$	V <sub>R</sub> =5V	1	1	10	μΑ
Domi. Wavelength	$\lambda_{\mathrm{D}}$	I <sub>F</sub> =150mA	455	460	465	nm
Luminous Flux	Фи	I <sub>F</sub> =150mA	5	10	-	lm
50% Power Angle	2θ1/2	I <sub>F</sub> =150mA	-	140	-	deg

## **■Forward Operating Current (DC)**



- \*1 Tolerance of measurements of dominant wavelength is ±1nm
- \*2 Tolerance of measurements of luminous Flux is  $\pm 15\%$
- \*3 Tolerance of measurements of forward voltage is ±0.1V

Note: Don't drive at rated current more than 5s without heat sink for Xeon H emitter series.

# **LED & Application Technologies**











http://www.optosupply.com VER C.1

<sup>\*</sup>Pulse width Max.10ms Duty ratio max 1/10



**Xeon H Power Blue LED** 

OSB4XNEHE1E VER C.1


## ■ Soldering Heat Reliability:

Reflow soldering Profile

- · Reflow soldering should not be done more than two times.
- · When soldering, do not put stress on the LEDs during heating.
- · After soldering, do not warp the circuit board.
- · Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable,

### characteristics of the LEDs will or will not be damaged by repairing.

Solder		
Average ramp-up rate = 3°C/sec. max.		
Preheat temperature: 150°~180°C		
Preheat time = 120 sec. max.		
Ramp-down rate = $6^{\circ}$ C/sec. max.		
Peak temperature = 220°C max.		
Time within 3°C of actual		
peak temperature = 25 sec. max.		
Duration above 200°C is 40 sec. max.		

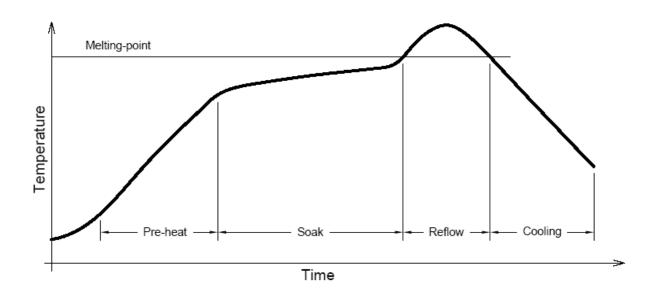







http://www.optosupply.com VER C.1