
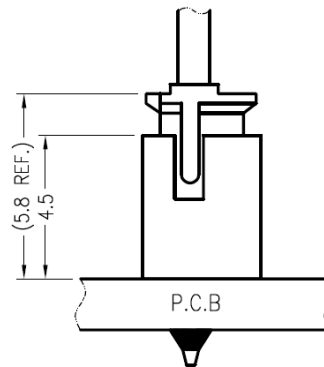
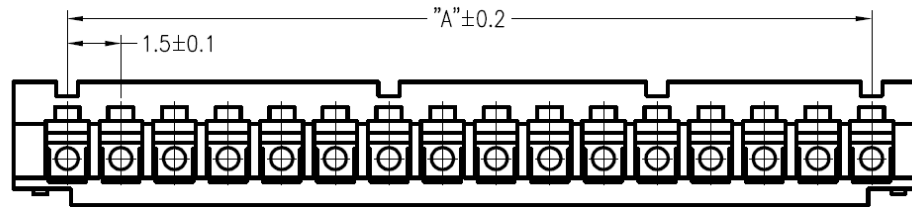



Poles	DIM.A	DIM.B	DIM.C
2P	1.5	3.4	4.5
3P	3.0	4.9	6.0
4P	4.5	6.4	7.5
5P	6.0	7.9	9.0
6P	7.5	9.4	10.5
7P	9.0	10.9	12.0
8P	10.5	12.4	13.5
9P	12.0	13.9	15.0
10P	13.5	15.4	16.5
11P	15.0	16.9	18.0
12P	16.5	18.4	19.5
13P	18.0	19.9	21.0
14P	19.5	21.4	22.5
15P	21.0	22.9	24.0
16P	22.5	24.4	25.5

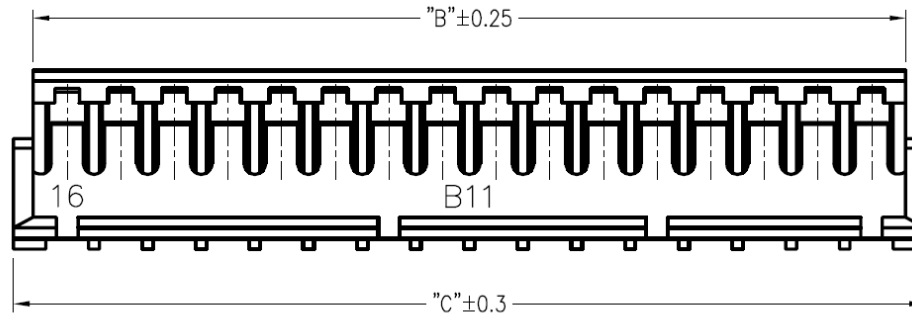

RoHS
Compliant

■ SPECIFICATIONS

- ◆ Rated voltage: 50V DC,AC(rms)
- ◆ Rated Current: 1A AC/DC(AWG#26)
- ◆ Withstand voltage: 500V AC/min.
- ◆ Working Temp : -25°C ~ +85°C
- ◆ Insulation resistance: ≥500 MΩ
- ◆ Contact resistance: ≤30 mΩ
- ◆ Applicable Wire: AWG#26~#32

■ MATERIAL

- ◆ Insulator: PA66, UL94-V0

Ordering Information

HF XX SZNM 1 - 44
 1.5Ph Housing 02~16Pin 1: Bag Packing

REV.	REVISION RECORD	DATE	General Tolerance		ARIBA TECHNOLOGY CO., LTD.
A	Original	02/14/22	LINEAR	ANGLE	
			0.0 ±0.25	±3°	
			0.00 ±0.20		
			UNIT: mm		
			A4	NAME	TITLE: 1.5 Pitch Housing 4.7L
			APPROVED	KENNY	DWG.NO: HFXXSZNM1-44
			DESIGNER	GRACE	REV. A
			DRAWN	JINDAR	SCALE 1 : 1 SHEET 1 OF 1