


■ SPECIFICATIONS

- ◆ Applicable Wire: AWG#30~ #24
- ◆ Rated Voltage: 100V DC,AC(rms)
- ◆ Rated Current: 2A (AWG#24)
- ◆ Withstand Voltage: 800V AC/min.
- ◆ Working Temp : -25°C ~ +85°C
- ◆ Insulation Resistance: ≥1000 MΩ
- ◆ Contact Resistance: ≤20 mΩ

■ MATERIAL

- ◆ Insulator: PA66 UL94-V0

Poles	2	3	4	5	6	7	8
DIM.A	2.00	4.00	6.00	8.00	10.00	12.00	14.00
DIM.B	4.50	6.50	8.50	10.50	12.50	14.50	16.50
DIM.C	0.60	1.30	3.30	5.30	7.30	9.30	11.30

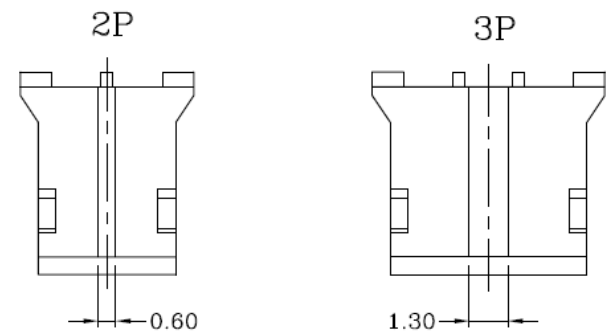

RoHS
Compliant

Poles	9	10	11	12	13	14	15	16
DIM.A	16.00	18.00	20.00	22.00	24.00	26.00	28.00	30.00
DIM.B	18.50	20.50	22.50	24.50	26.50	28.50	30.50	32.50
DIM.C	13.30	15.30	17.30	19.30	21.30	23.30	25.30	27.30

Ordering Information

HG XX PHNY 1 - 44
 | | | |
 2.0P Housing PIN No. 1: Bag Packing

REV.	REVISION RECORD	DATE	General Tolerance		ARIBA TECHNOLOGY CO., LTD.	
A	Original	08/14/19"	LINEAR	0.0 ±0.35 0.00 ±0.20	ANGLE ±3°	
				UNIT:mm		
			A4	NAME		TITLE: 2.0mm Pitch Housing 6.4L
			APPROVED	SUNNY		DWG.NO: HGXXPHNY1-44
			CHECKED	TED		REV. A
			DESIGNER	WING		SCALE 1:1 SHEET 1 OF 1