
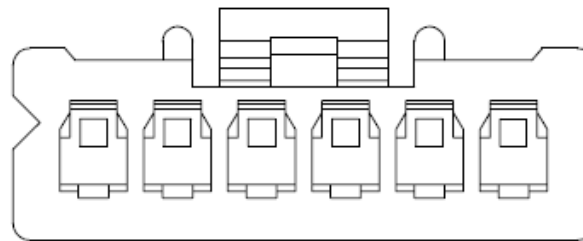


孔数	A	B	C
2	2.5	5.6	7.3
3	5.0	8.1	9.8
4	7.5	10.6	12.3
5	10.0	13.1	14.8
6	12.5	15.6	17.3
7	15.0	18.1	19.8
8	17.5	20.6	22.3
9	20.0	23.1	24.8
10	22.5	25.6	27.3
11	25.0	28.1	29.8
12	27.5	30.6	32.3
13	30.0	33.1	34.8
14	32.5	35.6	37.3
15	35.0	38.1	39.8

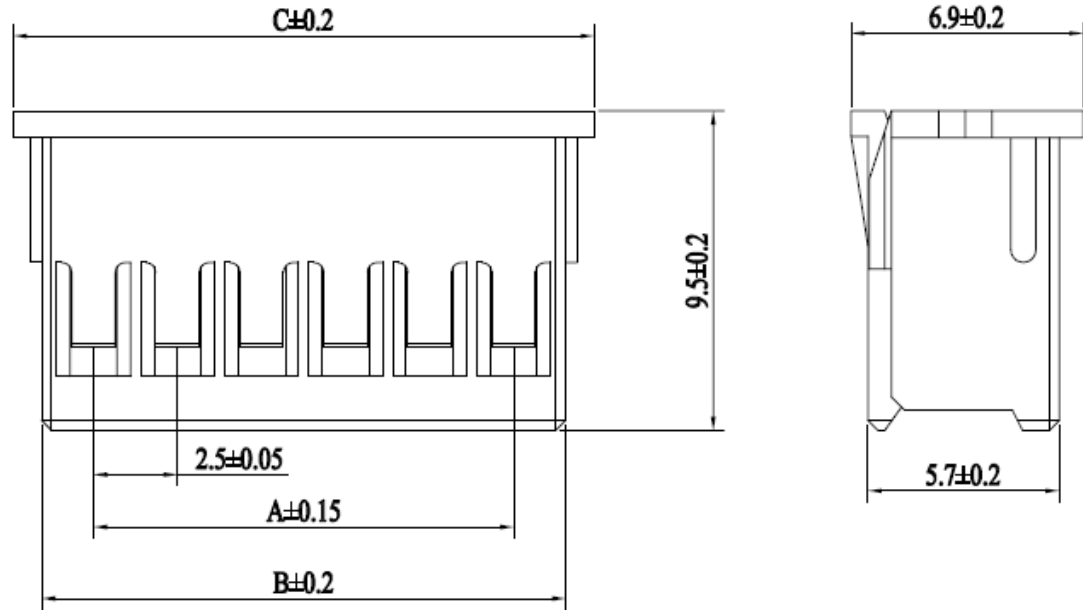

RoHS
Compliant

■ SPECIFICATIONS

- ◆ Rated voltage: 250V DC,AC(rms)
- ◆ Rated Current: 2.0A
- ◆ Withstand voltage: 1000V AC/min.
- ◆ Working Temp : -25°C ~ +85°C
- ◆ Insulation resistance: $\geq 1000 \text{ M}\Omega$
- ◆ Contact resistance: $\leq 0.02\Omega$

■ MATERIAL

- ◆ Insulator: PA66

Ordering Information

HH XX XANY 1 - 44
 2.5Ph Housing PIN No 1: Bag Packing

REV.	REVISION RECORD	DATE	General Tolerance		ARIBA TECHNOLOGY CO., LTD.
A	Original	01/21/21"	LINEAR	0.0 ±0.25 ANGLE ±3° 0.00 ±0.20	
				UNIT: mm	TITLE: 2.5 Pitch Housing 9.5L
			A4	NAME	
			APPROVED	KENNY	
			DESIGNER	GRACE	
			DRAWN	JINDAR	DWG.NO: HHXXXANY1-44
					SCALE 1 : 1 SHEET 1 OF 1
					REV. A