


■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1,000V AC/minute
- Insulation Resistance : 1,000MΩ min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20mΩ max.

■ HOUSING

- MPN. P/N: JS-2001-XX
- Poles : 2-20
- Material : Blank: Nylon 66 UL94V-0
- Color : Blank : Nature

Poles	Dimensions (mm)		
	A	B	C
2	2.50	7.30	5.70
3	5.00	9.80	8.20
4	7.50	12.30	10.70
5	10.00	14.80	13.20
6	12.50	17.30	15.70
7	15.00	19.80	18.20
8	17.50	22.30	20.70
9	20.00	24.80	23.20
10	22.50	27.30	25.70
11	25.00	29.80	28.20
12	27.50	32.30	30.70
13	30.00	34.80	33.20
14	32.50	37.30	35.70
15	35.00	39.80	38.20
16	37.50	42.30	40.70
17	40.00	44.80	43.20
18	42.50	47.30	45.70
19	45.00	49.80	48.20
20	47.50	52.30	50.70

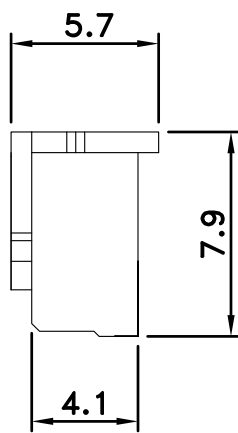

Ordering Information

HH XX 2001 1 - 81
 | | | |
 2.5P Housing PIN No. 1: Bag Packing



REV.	REVISION RECORD	DATE	General Tolerance	
A	Original	10/16/18*	LINEAR	0.0 ±0.35 ANGLE ±3°
				0.00 ±0.20
			UNIT: mm	
			A4	NAME DATE
			APPROVED	SUMMY
			CHECKED	TED
			DESIGNER	RUBY

ARIBA TECHNOLOGY CO., LTD.

TITLE: 2.50mm Pitch Housing 7.9L

DWG.NO: HHXXY2001-81 REV. A

SCALE 1 : 1 SHEET 1 OF 1